


	EQUIPAGGIAMENTI	AR8 ATTACCO PROLUNGATO 2 O-RING – M24 – D.14 mm. AR8 EXTENDET QUICK COUPLING 2 O-RING – M24 – D.0.55 in.		5	19/06/14
	TECNICI				
	LAVAGGIO				




CARATTERISTICHE TECNICHE SPECIFICATIONS

- PRESSIONE NOMINALE	<i>RATED PRESSURE</i>	350 bar – 35 MPa (5100 psi)
- PRESSIONE CONSENTITA	<i>PERMISSIBLE PRESSURE</i>	390 bar – 39 MPa (5650 psi)
- PORTATA MASSIMA	<i>MAX FLOW RATE</i>	30 l/min (8 USG p.m.)
- TEMPERATURA MASSIMA	<i>MAX WORKING TEMPERATURE</i>	160° C (320°F)
- MATERIALE	CORPO E NIPPLO IN OTTONE CON MANOPOLA IN PLASTICA ANTIURTO E GUARNIZIONI OR IN VITON.	
<i>MATERIAL</i>	BRASS BODY AND NIPPLE WITH SHOCKPROOF PLASTIC HANDLE AND VITON O RINGS.	

MISURE D'INGOMBRO OVERALL DIMENSIONS

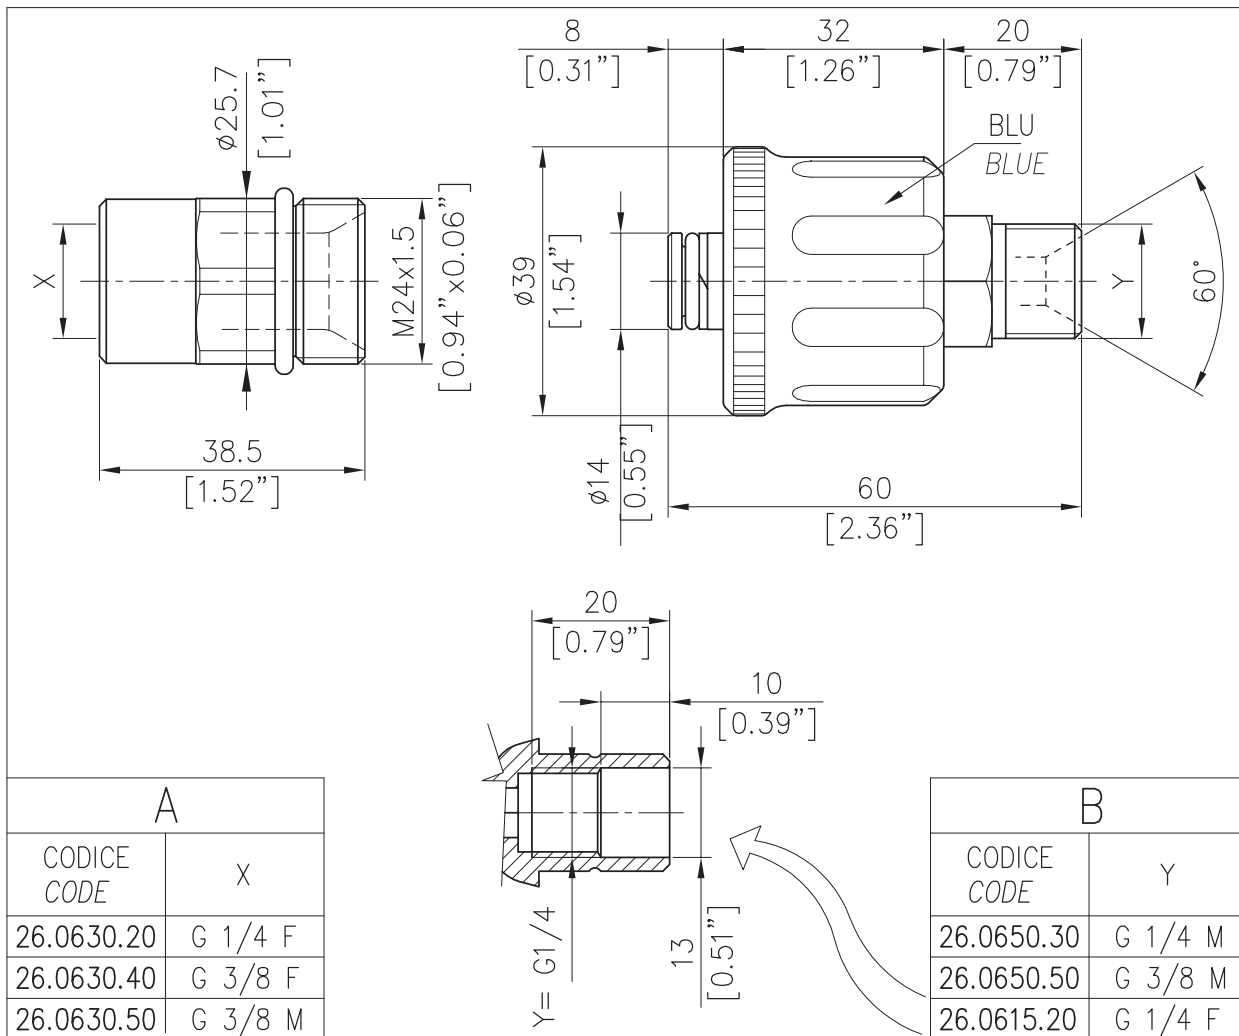

26.0630.20 AR8 A M24 screw-type nipple -1/4F Bsp
26.0630.40 AR8 A M24 screw-type nipple -3/8F Bsp



26.0650.30 AR8 B M24 3pcs screw.coupl.-1/4M Bsp
26.0650.50 AR8 B M24 3pcs screw.coupler-3/8M Bsp

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
1	26.0007.31	Coupling, 1/4 MF Bsp brass (1)	1					10
1	26.0036.31	Coupling, 3/8 M-1/4 F Bsp brass (1)	1					10
2	14.3562.05	Washer, 6x11x1 mm Cu	1					10
3	26.0652.22	Hand nut, M24x1,5 - 17,5mm blue	1					3
4	26.0651.31	Plug, 14mm-1/4M Bsp brass	1					3
5	10.3109.95	O-ring, 2,4x9,3 mm Vi 70	2					25
6	10.4010.01	Back-up ring,10,2x13,9x1,2mm	1					50
7	10.3185.00	O-ring, 2,5x20 mm	1					10
8	26.0631.31	Coupling, M24x1,5-1/4 F Bsp brass (2)	1					3
8	26.0632.31	Coupling, M24x1,5-3/8 F Bsp brass (3)	1					3

(1) 26.0650.30 (2) 26.0630.20 (3) 26.0630.40