
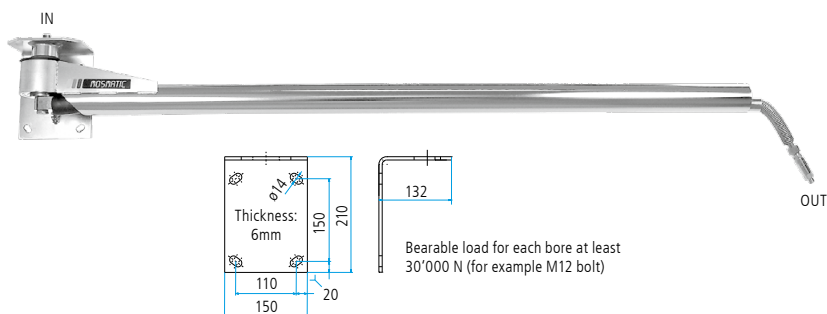


- ✓ **180° smooth rotation**
- ✓ **Insulated HP-hose**
- ✓ **Multiple industry application**

Wall-mounted booms are ideal for outdoor areas or in wash bays where ceiling mounts are not an option. The wall bracket is designed for the boom to return to the resting position you selected.

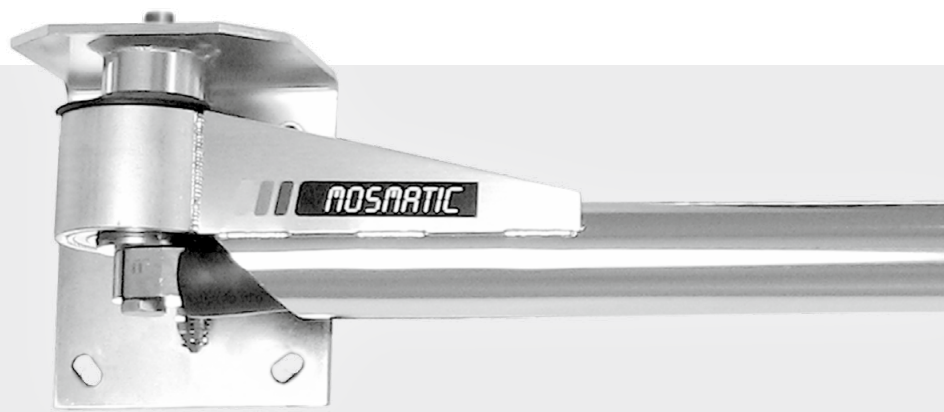


## WAE (with HP-hose)

Part No.	L	Weight
<b>68.502</b>	1450	10.2kg
<b>68.512</b>	1600	10.9kg
<b>68.522</b>	1750	11.6kg
<b>68.532</b>	1900	12.3kg
<b>68.542</b>	2050	13.0kg
<b>68.552</b>	2250	13.7kg
<b>68.562</b>	2500	14.9kg
<b>68.572</b>	2750	16.1kg
<b>68.582</b>	3000	17.3kg

## WAE (with pipe)


Part No.	L	Weight
<b>68.301</b>	1450	10.0kg
<b>68.302</b>	1600	10.7kg
<b>68.303</b>	1750	11.4kg
<b>68.304</b>	1900	12.1kg
<b>68.305</b>	2050	12.8kg
<b>68.306</b>	2250	13.4kg
<b>68.307</b>	2500	14.6kg
<b>68.308</b>	2750	15.8kg
<b>68.309</b>	3000	17.0kg

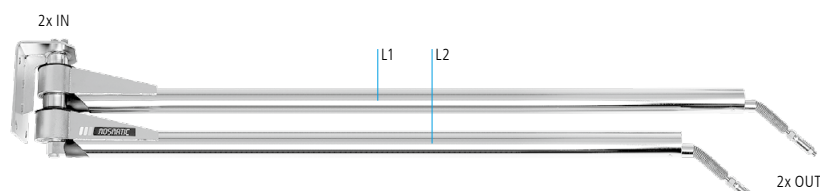

When using high and low pressure, use upper boom for low pressure.

## WAD



Part No.	L1	L2	Weight
<b>61.402</b>	1600	1450	19.1kg
<b>61.412</b>	1750	1600	19.9kg
<b>61.422</b>	1900	1750	20.7kg
<b>61.432</b>	2050	1900	21.5kg
<b>61.442</b>	2250	2050	22.4kg
<b>61.452</b>	2500	2250	23.6kg



Wall-Boom available with choice of park positions. w/o (neutral), left or right.

## WAN (with pipe)

Part No.	L	RS	Weight
<b>60.001</b>	2000	left	8.6kg
<b>60.002</b>	2000	without	8.6kg
<b>60.003</b>	2000	right	8.6kg
<b>60.021</b>	2500	left	11.3kg
<b>60.022</b>	2500	without	11.3kg
<b>60.023</b>	2500	right	11.3kg

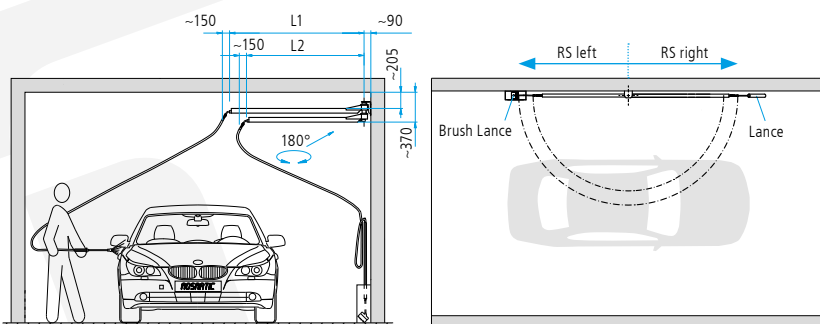

## TECHNICAL DATA

<b>Pressure</b>	275 bar (27.5 MPa)
<b>Temperature</b>	120°C
<b>Inlet (top &amp; side)</b>	G1/4" F (other options available)
<b>Outlet</b>	G1/4" M (other options available)
<b>Throughput medium</b>	water, oil, air at pH 3-12

## Legend

M... = metric thrust, ..M = male, F = female, G = gas pipe thrust, QV = quick connects, SV = profile ring fitting  
D = diameter, k = conical, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position