




EQUIPAGGIAMENTI
TECNICI
LAVAGGIO

F5LB FILTRO ASPIRAZIONE ACQUA
F5LB PLASTIC INTAKE STRAINER
28.0370.00



6

26/05/15




- COSTRUZIONE LEGGERA IN MATERIALE PLASTICO, (POLIPROPILENE+30%FV) CON INSERTI IN OTTONE FILETTATI.
LIGHT PLASTIC CONSTRUCTION (POLYPROPYLENE + 30% FV) WITH BRASS THREADED INSERTS.
- VASO IN MATERIALE PLASTICO TRASPARENTE, (PA6) .
PLASTIC TRANSPARENT VASE, (PA6) .
- CARTUCCIA IN ACCIAIO INOX AISI 304 .
SCREEN IN STAINLESS STEEL AISI 304 .


SPECIFICHE TECNICHE SPECIFICATIONS

- PRESSIONE NOMINALE <i>RATED PRESSURE</i>	10 bar – 1 MPa (145 psi)
- PORTATA MASSIMA <i>MAX FLOW RATE</i>	VEDI GRAFICO PORTATA/ ΔP <i>SEE CHART FLOW/PRESSURE</i>
- TEMPERATURA MASSIMA <i>MAX WORKING TEMPERATURE</i>	40° C (105 °F)
- POTERE FILTRANTE <i>STRAIN. POWER</i>	46 mesh – 300 μ m

MISURE D'INGOMBRO OVERALL DIMENSIONS

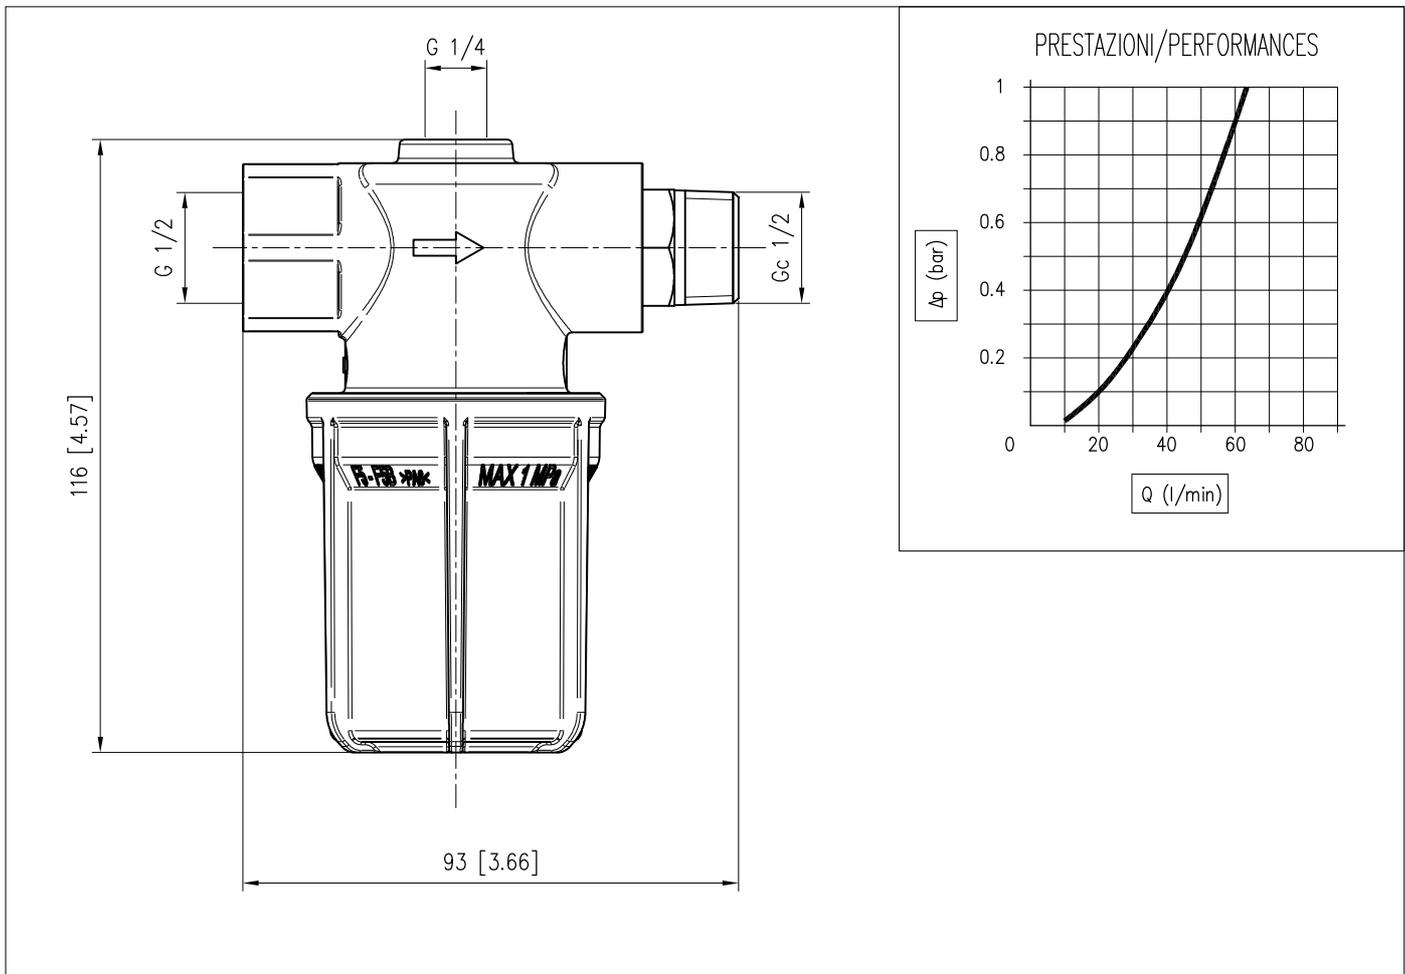

28.0370.00 F5L B-Suct.strain.1/2Bsp/t FM+1/4F

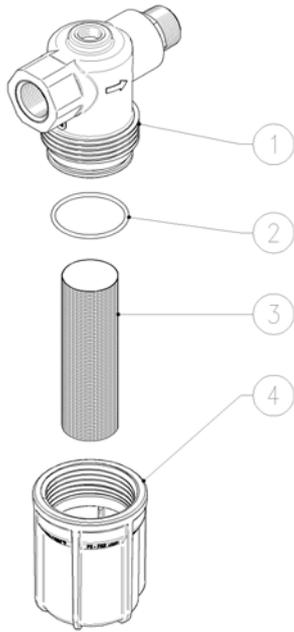

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
1	28.0351.22R	Strain.housing, 1/2 Bsp/tFM-1/4F	1					5
2	10.3105.00R	O-ring, 2x38 mm	1					10
3	28.0323.53R	Net, 27x90mm 46mesh-300µm Sst.	1					10
4	28.0321.84R	Strainer plug, Pa	1					3