


PRODUCT DETAILS

THREEPHASE ELECTRIC MOTOR 11kW

T413311/NR1G5KG

DIMENSIONS

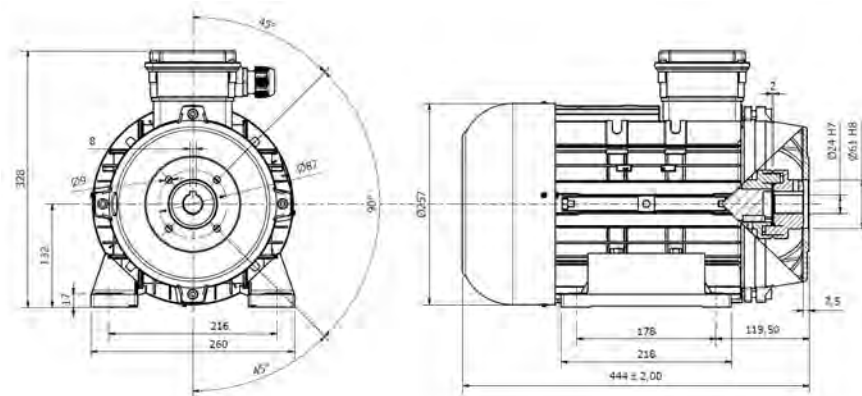


Insulation	: cl.F
Protection IP	: 55
Frame IEC	: 132M
Service	: S1
Color	: RAL9005
Material	: Alluminium
Coupling	: KTR AR38 24/38
Thermik	: 2xS01 150°C

DATA

Type	RN 132Mc4
Rated Power	11,0 kW
RPM	1400 g/m
Electrical supply	400/690V-50Hz
Efficiency	79,8%
Power factor	Cosφ 0,83
Current	(400V) 24,0 Amp
D.O.L. Current start.	(IS/IN) 7,5
Torque	72,0 Nm
Starting Torque	(Cs/Cn) 2,5
Max Torque	(Cm/Cn) 3,0
Moment of inertia	0,038
Weight	60,0 Kgs

Three – phase connection
Star connection



Three – phase connection
Triangle connection

